960mA Power Module


Datasheet

Product Introduction

This KNX power supply, with integrated monitoring function, delivers a stable 30V DC power source for EIB/KNX system. It has two output terminals: one for bus power and signal transmission, and the other for auxiliary power. Its modular design enables easy installation on a 35mm DIN rail. It also includes a reset button to restore the power in case of a fault, ensuring continuous system operation.

Features

- **Dual output: Support two outputs with a total current of 960mA**
- **Overload protection: Automatically cut power and alerts**
- **Short-circuit protection: Automatically cut power and alerts**
- **Bus reset**

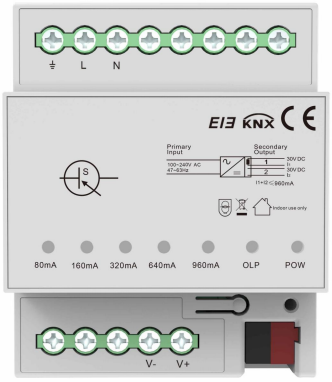

Specification

- Product Model: KXPW-B1A960
- Input Voltage: 100 ~ 240VAC
- Output Voltage: 30V DC
- Output Current: <960mA (total for both channels)
- Number of Channels: 2 channels
- Operating Temperature: -5 ~ 45°C
- Operating Humidity: 10 ~ 95% RH (non-condensing)
- Product Dimensions: 90×72×64mm
- Installation: 35mm DIN rail


akubela

10/F, No.56 Guanri Road, Software Park II , Xiamen 361009, China
Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061
Email: sales@akuvox.com Web: www.akubela.com

960mA Power Module

Datasheet


Wiring Diagram

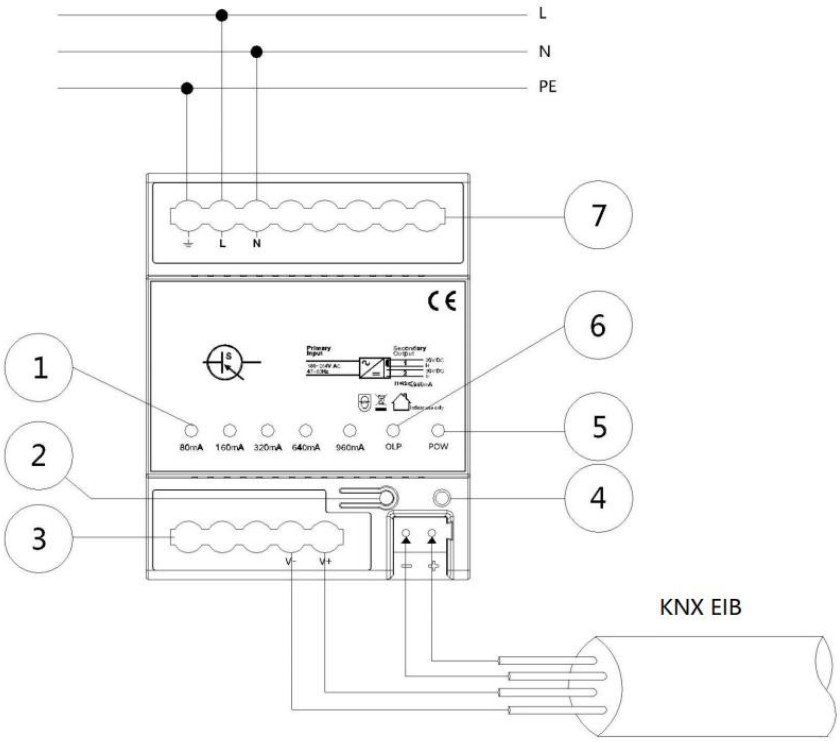


Description:

① Current Output Indicator
② Reset Button
③ EIB Power Output Terminal
④ Reset Indicator
⑤ Power Indicator
⑥ Overcurrent Protection Indicator
⑦ Power Input Terminal Block 220V

Product Dimension Diagram (mm)

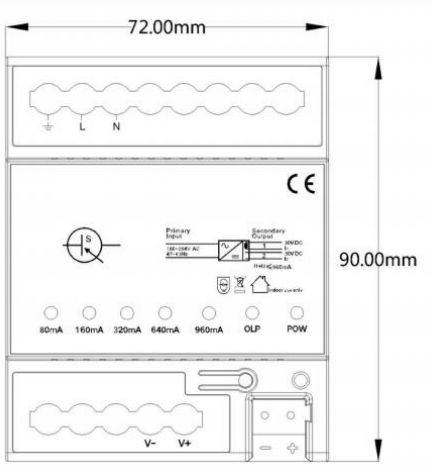

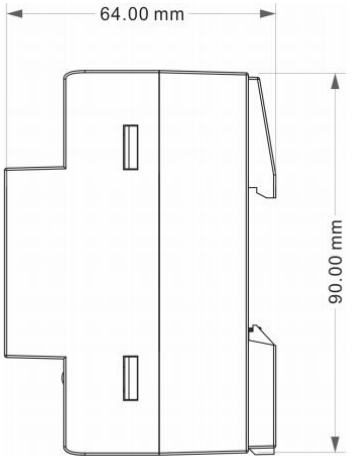

akubela

10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China
Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061
Email: sales@akuvox.com Web: www.akubela.com